

TBDM-隔爆/增安

TKB-隔爆/增安.铠装

TBDM系列防爆电缆夹紧密封接头 cable gland TKB系列隔爆铠装电缆引入装置(填料函、电缆戈兰) cable gland



材质 Material	采用优质黄铜或不锈钢制成，机械式电缆 Made of high quality brass or stainless steel, mechanical cable
特点 Features	外部密封套的电缆 Cable for external sealing sleeve
防爆标志 Ex mark	Ex eIIC 防护等级 Degree of protection IP65
工作温度 COT	-60°C ~100°C




材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)
特点 Features	适用于钢丝铠装、钢带铠装、编织带铠装、船用编组及铅护套电缆(需配特定的接地垫圈) Suitable for steel wire armored, braided, marine marshalling and lead sheathed cable (with specific grounding washer)
防爆标志 Ex mark	Ex eIIC Gb Ex dIIC/DIP A21 TA 防护等级 Degree of protection IP68
工作温度 COT	-60°C ~100°C



- 1、单向压铠装置适合所有类型的铠装电缆，安装简单的同时最大程度避免了错误安装情况
- 2、外部密封套的电缆
- 3、密封圈材质：硅橡胶(-60°C~+80°C)
- 4、用于区1区2、20、21区和22区

- 1, one-way pressure device is suitable for all types of armored armored cable, simple installation and To avoid the error of the installation of the situation
- 2, external seal sets of cable
- 3, sealing material: silicone rubber (-60 or C~+80 or C)
- 4, 2, 20, 21, 22 and 1 in the area.

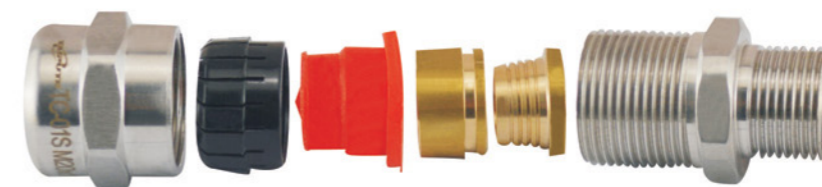

单位:mm

规格型号 Gland size	外层电缆 B Outer sheath B	螺纹长度 D Threadlength D
TBDM-V 1/2"	10-14	66
TBDM-V 3/4"	12-19	66
TBDM-V 1"	15-24	82
TBDM-V 1 1/4"	18-3	85
TBDM-V 1 1/2"	26-38	85
TBDM-V 2"	30-48	90
TBDM-V 2 1/2"	38-57	90
TBDM-V 3"	55-67	90
TBDM-V 4"	48-80	95

- 1、以上仅列举采用管螺纹规格，螺纹规格为公制或NPT均可制作，采用不锈钢请注明。
- 1, the above is only for the use of pipe thread specifications, thread specifications for the metric or NPT can be produced, the use of stainless steel, please specify.

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	外层电缆 B Outer sheath B	内层电缆 A Inner sheath A	最大外径E Max Across Corners E	G
	公制ISO Metric ISO	NPT/G					
TKB-01S	M20 x 1.5	1 / 2	15	6-12	3.25-7.8	31	47
TKB-01	M20 x 1.5	1 / 2	15	9-16	7.6-11.8	31	47
TKB-02	M20 x 1.5	1 / 2	15	12.5-20.5	11.1-14.2	38	48
TKB-03	M25 x 1.5	3 / 4	15	16.9-26	13.2-20.1	45	51
TKB-04	M32 x 1.5	1	15	22-33	19.2-26.4	56	51
TKB-05	M40 x 1.5	1-1/4	15	28-41	25.2-32.4	66	58
TKB-06	M50 x 1.5	1-1/2	15	36-51	31.6-44.3	78	66
TKB-07	M63 x 1.5	2	15	46-65	42.6-56.2	101	68
TKB-08	M75 x 1.6	2-1/2	15	57-78	54.6-68.1	116	73

- 1、可选附件：变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
- 2、NPT螺纹长度为有效螺纹长度；
- 1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
- 2, NPT thread length for effective thread length;